


## [2017-Aug-News200-355 PDF Dumps Guarantee 100% Pass - Braindump2go[NQ23-NQ35]

2017 Aug New Cisco 200-355 Exam Dumps with PDF and VCE Free Updated in [www.Braindump2go.com](http://www.Braindump2go.com) Today!100% 200-355 Real Exam Questions! 100% 200-355 Exam Pass Guaranteed! 1.|2017 New 200-355 Exam Dumps (PDF & VCE) 459Q&As Download:<https://www.braindump2go.com/200-355.html> 2.|2017 New 200-355 Exam Questions & Answers Download: <https://drive.google.com/drive/folders/0B75b5xYLjSSNRmRpZmZRdkotbUk?usp=sharing> QUESTION 23Following the deployment of a wireless network for data and voice services, an engineer is to validate the coverage. Which type of survey is required to ensure coverage? A. passiveB. activeC. fingerprintingD. calibrating Answer: A QUESTION 24During the deployment of a wireless network for data and location services, an engineer is to fine- tune the location services. What is this type of survey called? A. passive fingerprintingB. passive calibratingC. active fingerprintingD. active calibrating Answer: A QUESTION 25Refer to the exhibit. In an effort to identify RF characteristics at a customer location, an RF engineer uses the Spectrum Analyzer tool that is shown. Which feature that is native to the Spectrum Analyzer is identified by the exhibit?

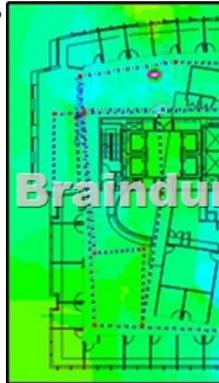

A. Real-Time FFTB. Duty CycleC. Max HoldD. Time Domain Answer: A QUESTION 26Refer to the exhibit. The site in this AirMagnet Survey heat map is ready for which level of service? A. dataB. voiceC. locationD. RFID Answer: A QUESTION 27Which two services require an RToWLAN design? (Choose two.) A. WVoIPB. video conferencingC. multicast videoD. TelnetE. SSH Answer: ABQUESTION 28In the current RF environment, the noise floor is -95 dBm. A tablet needs an SNR of 25 dB to transmit at the required speed. What must the RSSI cell edge be to meet the required SNR? A. -120 dBmB. -90 dBmC. -70 dBmD. -60 dBmE. -50 dBm Answer: C QUESTION 29An access point is currently transmitting at 4 mW. The customer needs to increase its signal strength by 6 dB to create a larger wireless cell. What should the new transmit power be? A. 8 mWB. 10 mWC. 12 mWD. 16 mWE. 24 mW Answer: D QUESTION 30A wireless engineer is designing the wireless networking for a company with offices in two different locations. Which two regulatory bodies should they check to find the maximum EIRP allowed? (Choose two.) A. IEEEB. FCCC. ITU-RD. ETSIE. Wi-Fi Alliance Answer: BD QUESTION 31After installing a Cisco 5508 Wireless Controller using the default settings, how often will the RRM update occur? A. 30 seconds B. 60 secondsC. 300 secondsD. 600 secondsE. 3600 secondsF. 7200 seconds Answer: D QUESTION 32A customer has requested a single point of policy enforcement for LAN and WLAN. Which deployment model should be used? A. convergedB. autonomousC. FlexConnectD. centralized Answer: A QUESTION 33Which CLI command is used on a Cisco WLC to troubleshoot mobility, rogue detection, and load- balancing events? A. debug dot11B. debug capwap allC. show dot11 details D. show capwap details Answer: A QUESTION 34Which three WLC debug commands are appropriate to troubleshoot a wireless client that is associated to an AP? (Choose three.) A. debug capwapB. debug mac addrC. debug dot11D. debug dhcpE. debug apF. debug dtls Answer: BCD QUESTION 35An engineer wants to have users who connect to a WLAN be redirected to a terms-of-service page with the company logo and a login. What should be configured on the WLAN to enable this capability? A. Layer 2 IEEE 802.1xB. Web Policy Slash Page Web RedirectC. Web Policy AuthenticationD. AAA ServersE. Web Policy Passthrough Answer: C **!!!RECOMMEND!!!** 1.|2017 New 200-355 Exam Dumps (PDF & VCE) 459Q&As Download: <https://www.braindump2go.com/200-355.html> 2.|2017 New 200-355 Study Guide Video: YouTube Video: [YouTube.com/watch?v=InZZcmAm920](https://www.youtube.com/watch?v=InZZcmAm920)